


INSTALLATION

1. INSTALL REAR SEAT CENTER ARMREST BOX ASSEMBLY

Install the rear seat center armrest box assembly with the 6 bolts.

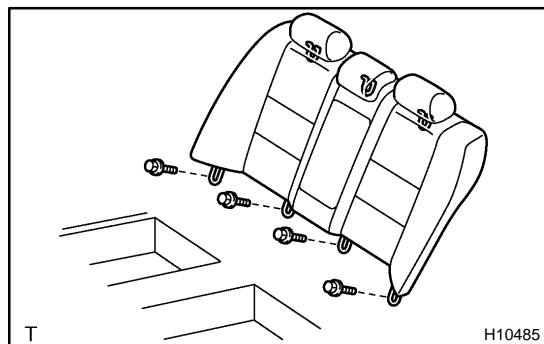


2. INSTALL SEATBACK ASSEMBLY

- (a) Install the seatback assembly with the 4 bolts.

Torque: 7.8 N·m (80 kgf·cm, 69 in.-lbf)

- (b) Install the rear seat belts to the belt guides, then close the belt guides.

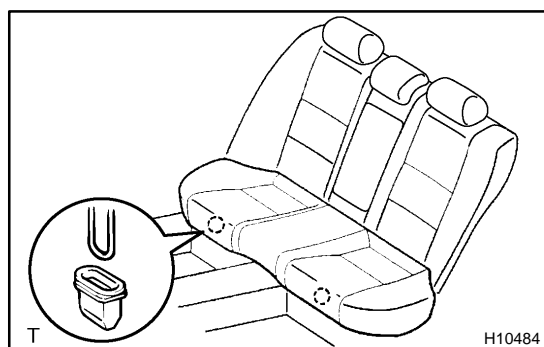

3. INSTALL SEAT CUSHION ASSEMBLY

Push down the front portion of the seat cushion assembly to install it.