


REMOVAL

1. REMOVE ENDS OF MOULDING

- Apply protective tape to the outer surface as shown in the illustration to keep the surface from being scratched.
- Using a heat light, heat the moulding to 20 - 30 °C (68 - 86 °F).

NOTICE:


Do not heat the moulding excessively.

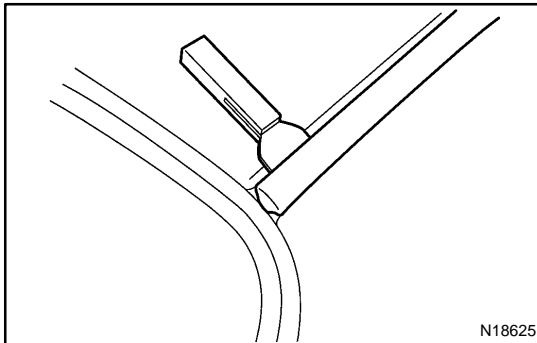

- Using a scraper, pull off the roof drip side finish moulding from the front end and rear end.

HINT:

Tape the scraper tip before use.

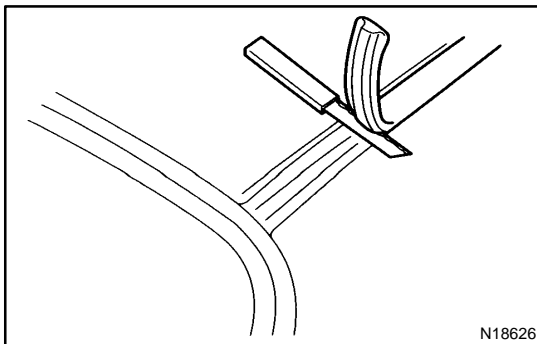

2. REMOVE MOULDING AND ADHESIVE

- Pull off the moulding by cutting the adhesive with a knife at the front and rear ends.
- Remove the moulding.

NOTICE:

Do not damage the body with the knife.