


REAR FLOOR PAN (ASSY)

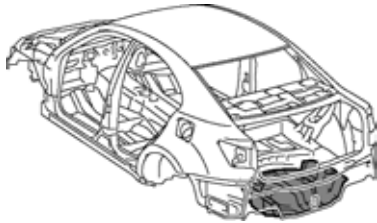

B0709140127

With the body lower back panel removed.

Symbol meaning

REMOVAL


△ : Remove Weld Points

INSTALLATION

◻ : MIG Plug Weld

⬮ : Tack Weld

REMOVAL-INSTALLATION

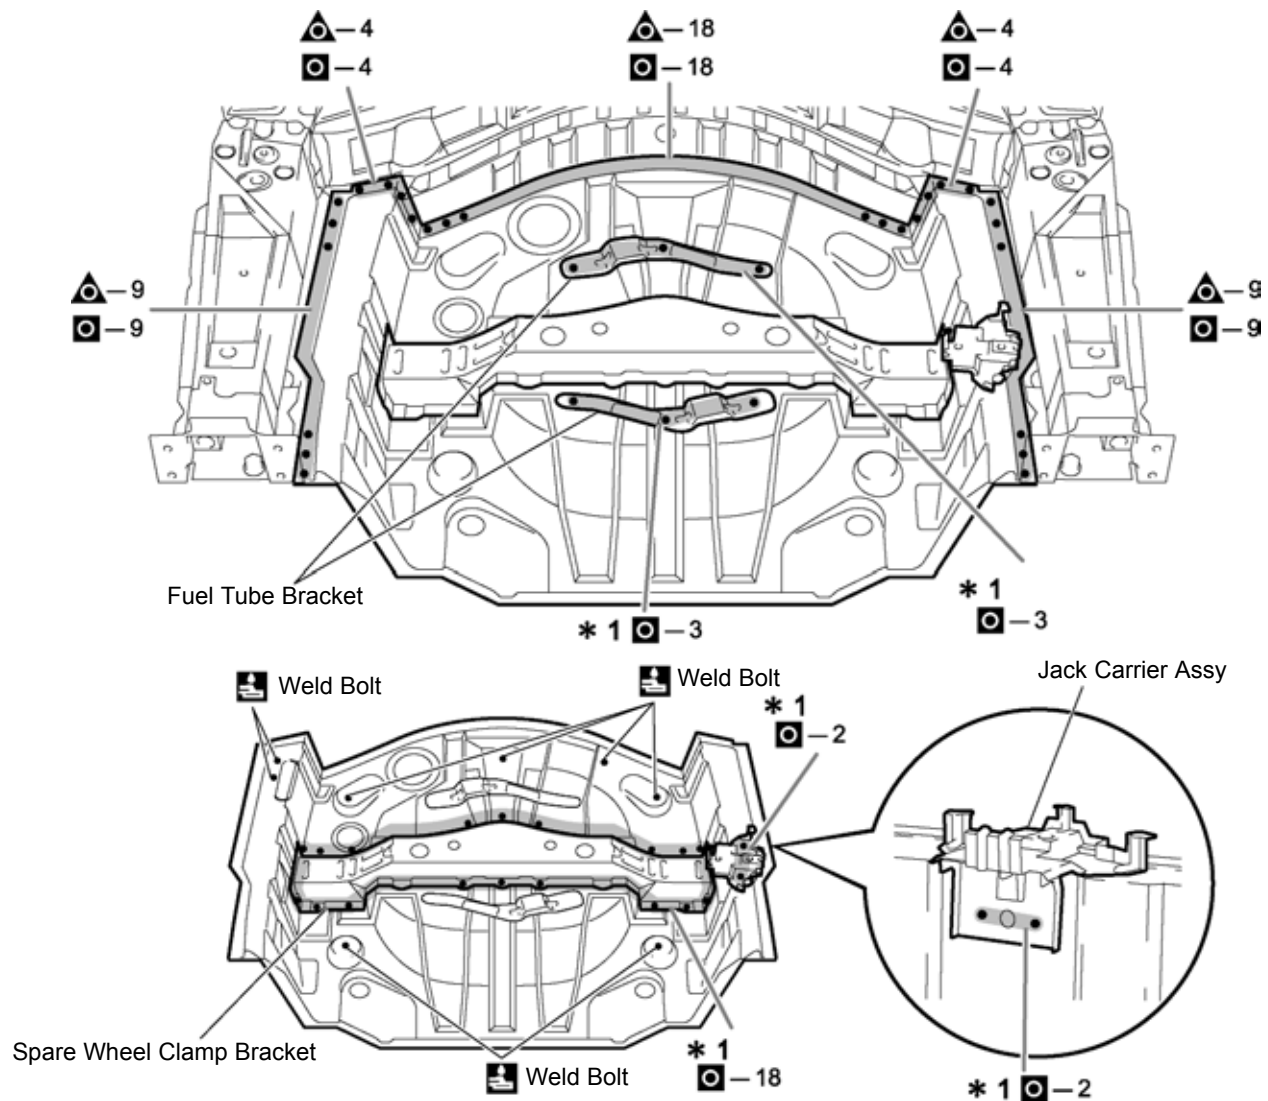

B0709140154

REMOVAL POINT

- 1 Fuel tube bracket, spare wheel clamp bracket and jack carrier assy at the same time.

INSTALLATION POINT

- 1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- 2 For positioning of the new parts, the installation standard holes of the Rear floor side rear member and the Rear floor side front member shall be matched.
- 3 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint-coating)
- 4 *1 indicates installation work.