

## ■IMPROPER CONNECTION PREVENTION LOCK MECHANISM

This improper connection prevention lock mechanism consists of center airbag sensor assembly and the holder.

- The center airbag sensor assembly has connector lock pin.
- The holder has a lever with a lock groove. The holder and the connectors are locked via a retainer and a lance

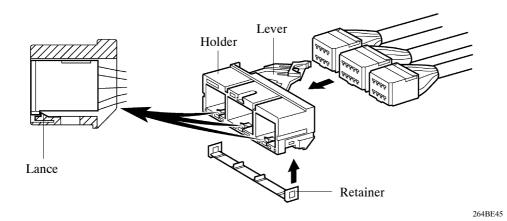

When connecting the holder and connectors to the center airbag sensor assembly, the lever is pushed into position end by rotating it around the axis of the connector lock pin in order to lock the holder securely.

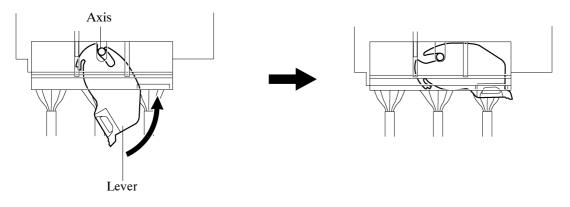

264BE46