
■ DIFFERENTIAL PRE-TORQUE MECHANISM

A conical spring is provided between the side gear and the side gear washer in the differential area. The load of the conical spring applies a friction force to the sliding area to improve the start off performance of the vehicle on slippery road surfaces.

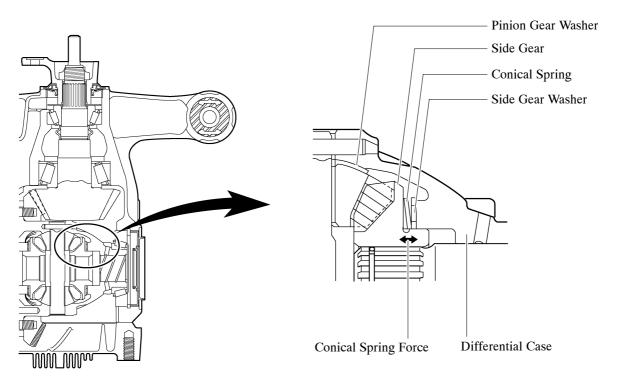

08D0CH04C