


■ DIFFERENTIAL SUPPORT

- The rear differential is supported on the suspension member at 4 points: 2 front and 2 rear.
- A liquid-filled differential mount is used at the rear to reduce vibration and noise.

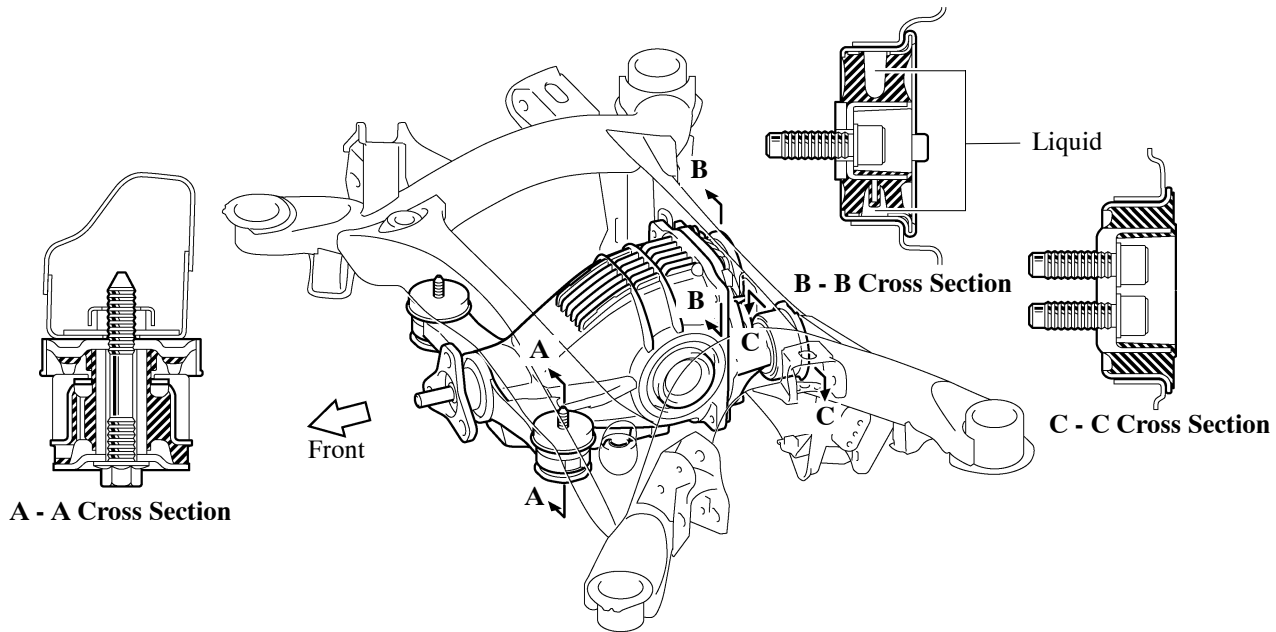

08D0CH06C